


FLOOR DRAIN FOR MEMBRANE FLOOR AREAS

Specification: MIFAB Series F1210C lacquered cast iron floor drain with anchor flange, cast iron clamp ring with weepholes for waterproofing membrane, and (specify material finish) strainer.

Function: Used in showers, kitchens, restrooms and other membrane finished areas. Round, adjustable strainer is used with all types of poured finished floors. Membrane clamp is provided to secure the waterproofing membrane.

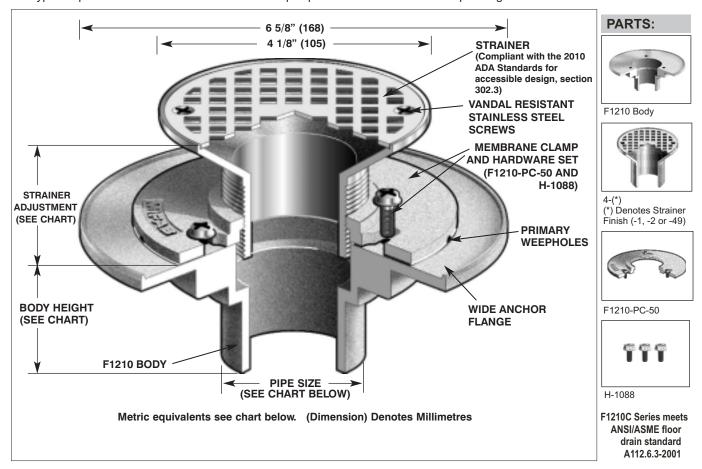

STRAINER	PIPE	STRAINER Adjustment Min Max		ANSI/ASME RATING		PIPE	BODY HEIGHT				
DIAMETER	SIZE			FREE AREA LOAD RATING		SIZE	NO HUB (Standard)	PUSH On (P)	THREADED (T)	INSIDE Caulk (X)	
4 1/8" (105)	2" (51)	1 1/4" (32)	2 3/8" (60)	5in² (3226²)	UP TO	2" (51)	2 5/16" (59)	3" (76)	2 5/16" (59)	3 5/16" (84)	
	3" (76)	1 1/4" (32)	2 3/8" (60)	5in² (3226²)	2,000 LBS.	3" (76)	2 5/16" (59)	—	_	_	
	4" (102)	1 1/4" (32)	2 3/8" (60)	5in² (3226²)		4" (102)	2 5/16" (59)	-	_	_	

SUF	FIX	OPTIO	NAL VARIATION	ONS:	SUFFIX			SUFFIX				
	-1	Nickel bronze strainer			-49	Chrome Plate	d Strainer	-G	Oval 4	Oval 4" x 9" funnel		
	-2 Polished bronze strainer			-ARRA	ARRA (Stimul	,	-HP		Heel proof grate (1/4" maximum grate opening size, -3 only)			
	-6	Security screws (T-20 Torx & pin)				compliant pro			3			
	-11	Acid res	sistant epoxy body		-BA	Buy American compliant pro		-J (Standard		x 1" funnel o outlet		
	-13	Galvani	ized body		-F4	4" Round funi	nel	Р	Push o	n outlet (2" only)		
	-15	Extensi	on		-F6	6" Round fund	nel	-PA		vivania Steel mpliant product		
								T	Threac	led outlet (2" only	r)	
								Χ	Inside	caulk outlet (2" oi	nly)	

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880