

Location: _____




F1240

UTILITY AREA DRAIN

Specification: MIFAB Series F1240 lacquered ductile iron area drain with 1/2" (13) thick, 6 1/2" (165) diameter heavy duty ductile iron grate with stainless steel screws. Recommended for use in vehicular traffic areas.

Function: Used in warehouses, mechanical rooms and other non-membrane finished areas. Round strainer is used with all types of finished floors. Shallow depth body is ideal for shallow pour applications.

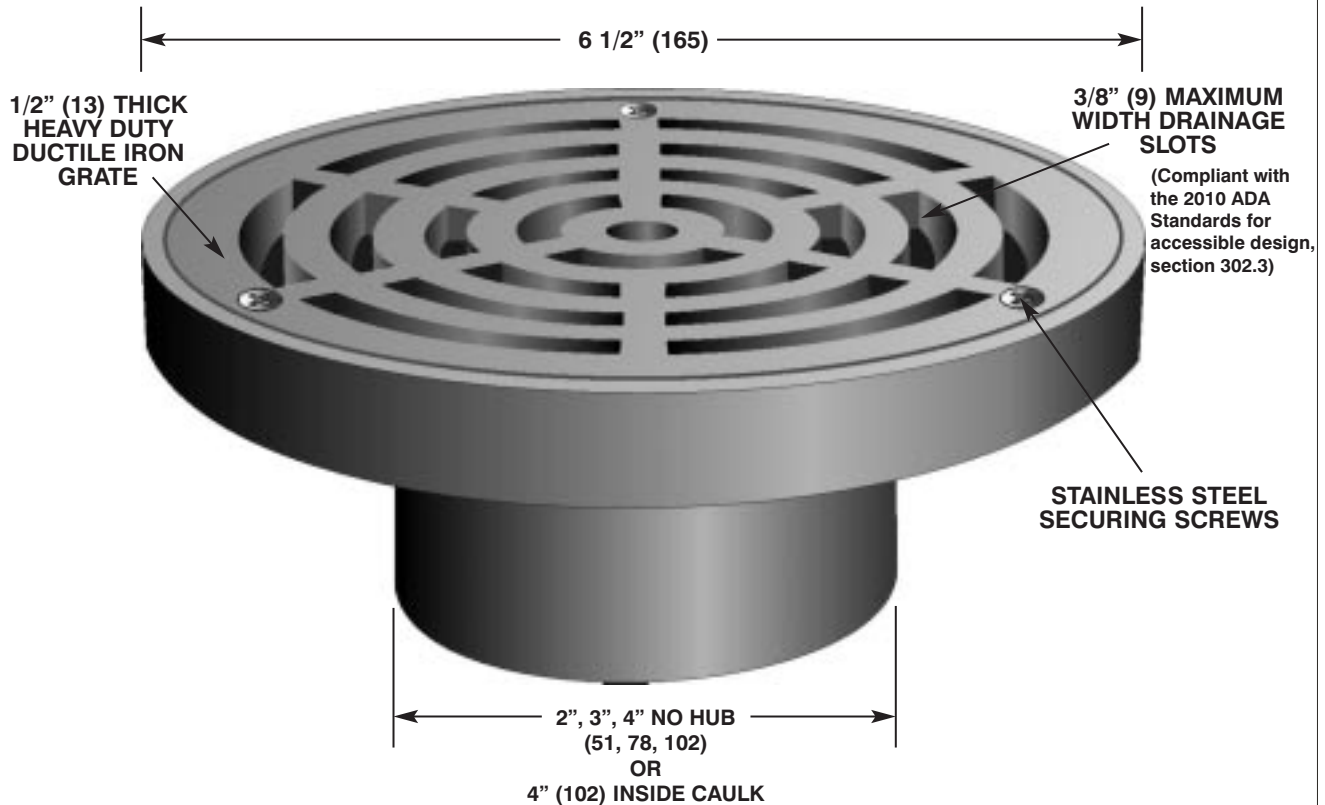

Metric equivalents see chart below. (Dimension) Denotes Millimetres

F1240 Series meets ANSI/ASME floor drain standard A112.6.3-2001

MODEL NO.	PRODUCT DESCRIPTION	OUTLET SIZE	STRAINER SIZE	BODY HEIGHT	ANSI/ASME LOAD RATING	GRATE THICKNESS	FREE AREA
F1242-4	2" (51) No hub C.I. body	2" (51)	6 1/2" (165)	3" (76)	OVER 10,000 LBS.	1/2" (13)	10 in ² (6,452 ²)
F1243-4	3" (76) No hub C.I. body	3" (76)	6 1/2" (165)	3" (76)		1/2" (13)	
F1244-4	4" (102) No hub C.I. body	4" (102)	6 1/2" (165)	3" (76)		1/2" (13)	

SUFFIX OPTIONAL VARIATIONS:

-5	Sediment bucket
-6	Security screws (TR30 Torx & pin)
-8	Backwater valve (2", 3", 4")
-11	Acid resistant epoxy coated body
-13	Galvanized body
-34	Closure plug

SUFFIX

-ARRA	ARRA (Stimulus Act) compliant product
-BA	Buy American Act compliant product
-HP	Heel proof grate (1/4" maximum grate opening size, -3 only)
-PA	Pennsylvania Steel Act compliant product
X	Inside caulk outlet (4" only)

Job Name: _____
 Section No: _____
 Schedule No: _____

Page No: _____
 Contractor: _____
 Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880