



FLOOR DRAIN WITH 12" ROUND NON ADJUSTABLE TRACTOR GRATE AND SHALLOW BODY

Specification: MIFAB Series F1340-Y-Q, lacquered cast iron shallow sump floor drain with anchor flange and non adjustable grate top assembly with standard 1" (25) thick, 12" round, (specify material finish) tractor grate.

Function: Used in heavy traffic areas such as parking garages, factories and loading docks. Shallow body is ideal for poured in place concrete decks where space is limited.

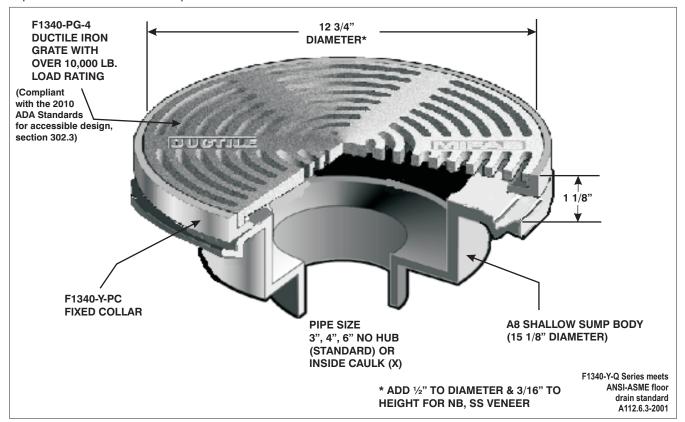



PIPE	BOD	BODY HEIGHT			
SIZE	NO HUB (Standard)	INSIDE Caulk (X)			
3" (76)	4 1/8" (105)	4 ½" (114)			
4" (102)	4 1/8" (105)	4 ½" (114)			
6" (152)	4 1/8" (105)	4 ½" (114)			

SUFFIX -1	OPTIONAL VARIATIONS: Nickel bronze grate (veneer)	SUFFIX -21	Secondary flat stainless steel	SUFFIX -ARRA	ARRA (Stimulus Act)
-3 -4 -5 -6	Stainless steel grate (veneer) Ductile iron strainer assembly Sediment bucket Vandal proof secured grate	-28 -30 -31	strainer (2", 3", 4") Stainless steel body (Type 304) PVC socket connection body ABS socket connection body	-BA -F4	compliant product Buy American Act compliant product 4" Round funnel 6" Round funnel Oval 4" x 9" funnel
-7	(TR30 Torx and Pin) (H-1072B) ½" trap seal primer connection	-34 -40	Closure plug Underdeck clamp	-F6 -G	
-8 -11	Backwater valve (2",3",4") Acid resistant epoxy	-41 -50	Sump receiver Lacquered cast iron dome	-HP	Heel proof grate (1/4" maximum grate opening size, -3 only) 3" x 1" funnel
-12	coated body Galvanized top assembly	-90 -90NH	Threaded side outlet (2",3",4") (cast iron only) No hub side outlet (2", 3", 4")	-J (Standard)	No hub outlet
-13 -15	Galvanized body Extension	-95N11	(cast iron only) Client logo	-PA	Pennsylvania Steel Act compliant product
-16	Square Top	-95	Olletti logo	X -Z	Inside caulk outlet Extended wide elastomeric flange

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880