

Location: _____




F1510

AREA DRAIN WITH HEAVY DUTY GRATE AND SEDIMENT BUCKET (CONFORMS TO CSA STD.S413m)

Specification: MIFAB Series F1510 lacquered cast iron floor drain with deep sump body, wide anchor flange, weepholes, and adjustable collar with square heavy duty ductile iron hinged tractor grate with four piece surface membrane clamp, sediment bucket and free area of 51 in² (32,903²).

Function: Used in mechanical rooms, parking garages and other membrane finished areas. 12" square, adjustable tractor grate is used with all types of poured finished floors. Hinged grate permits easy access to sediment bucket. Surface membrane clamp is ideal for areas that have a surface membrane.

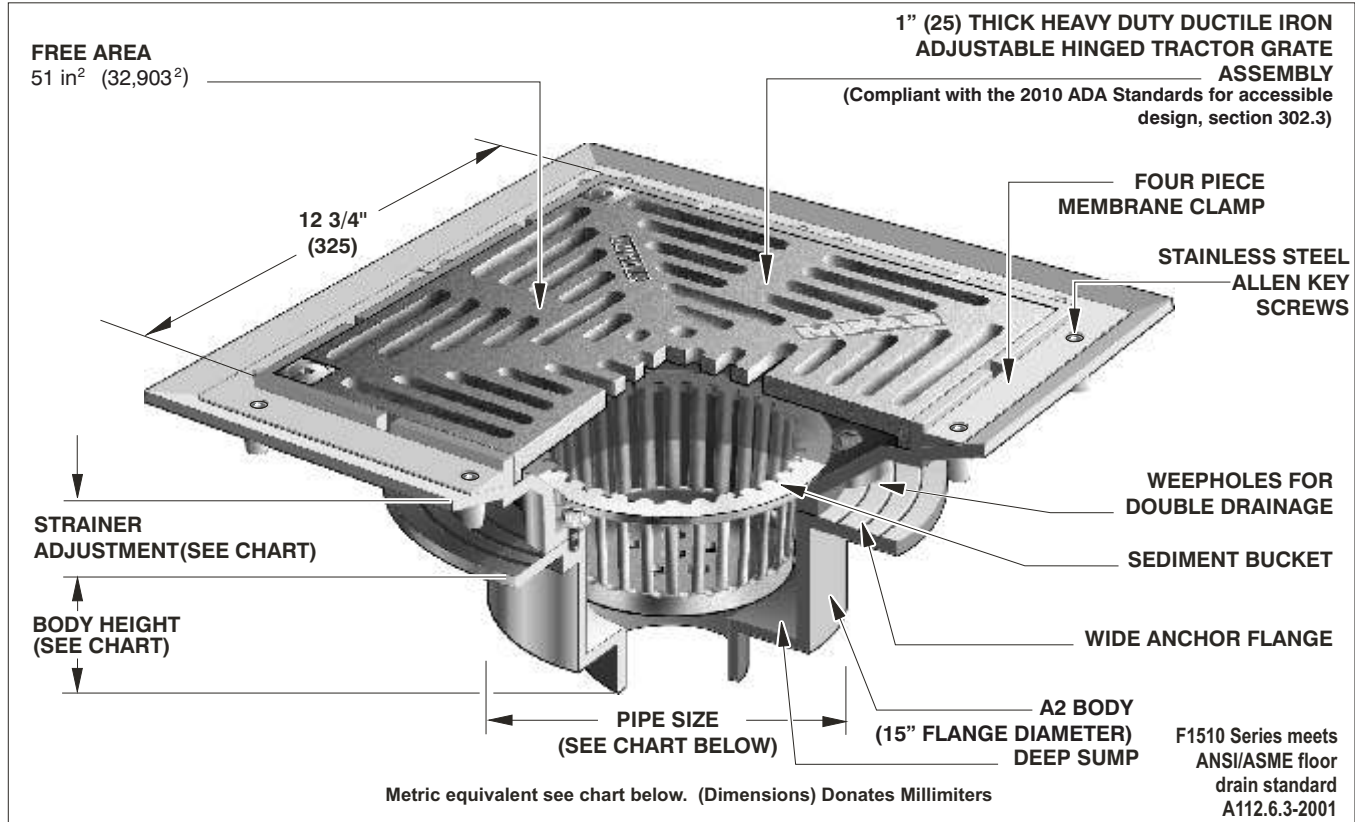

STRAINER DIAMETER	STRAINER ADJUSTMENT		FREE AREA	ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
	MIN	MAX		LOAD RATING	D.I. (-4)		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
12" x 12" (305 x 305)	2 1/4" (57)	4 1/8" (105)	51 in ² (32,903 ²)	ANSI/ASME LOAD CLASS "SPECIAL DUTY" (OVER 10,000 LBS.)		2" (51)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)
						3" (76)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
						4" (102)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)
						5" (127)	6" (152)	—	5 7/16" (138)	6 1/4" (159)	—
						6" (152)	7 1/4" (184)	7" (178)	7" (178)	6 1/4" (159)	—

SUFFIX OPTIONAL VARIATIONS:

- 4 Ductile iron grate (standard)
- 6 Security screws (TR30 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 12 Galvanized top assembly
- 13 Galvanized body
- 15 2" Extension (-TE)
- 28 Stainless steel body (Type 304)

SUFFIX

- 30 PVC socket connection body
- 31 ABS socket connection body
- 40 Underdeck clamp
- 41 Sump receiver
- 80 All aluminum
- 90 Threaded side outlet (2", 3", 4") (cast iron only)
- 90NH No hub side outlet (2", 3", 4") (cast iron only)
- ARRA ARRA (Stimulus Act) compliant product

SUFFIX

- BA Buy American Act compliant product
- C Membrane clamp
- HP Heel proof grate (1/4" maximum grate opening size, -3 only)
- (Standard) No hub outlet
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4")
- X Inside caulk outlet

Job Name: _____
 Section No: _____
 Schedule No: _____

Page No: _____
 Contractor: _____
 Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880