

Location: _____




F1560

HEAVY DUTY DRAIN WITH INTERNAL TRAP

Specification: MIFAB Series F1560 extra heavy duty lacquered area drain with side outlet body, internal deep seal trap and cleanout, seepage pan, standard 1" (25) thick, 12" (305) square heavy (specify material finish) hinged grate and suspended sediment bucket.

Function: Used in industrial factories, mechanical rooms, parking garages and other membrane finished areas. 12" square tractor grate is used with all types of poured finished floors. Hinged grate permits easy access to sediment bucket. The anchor flange provides maximum support for drain.

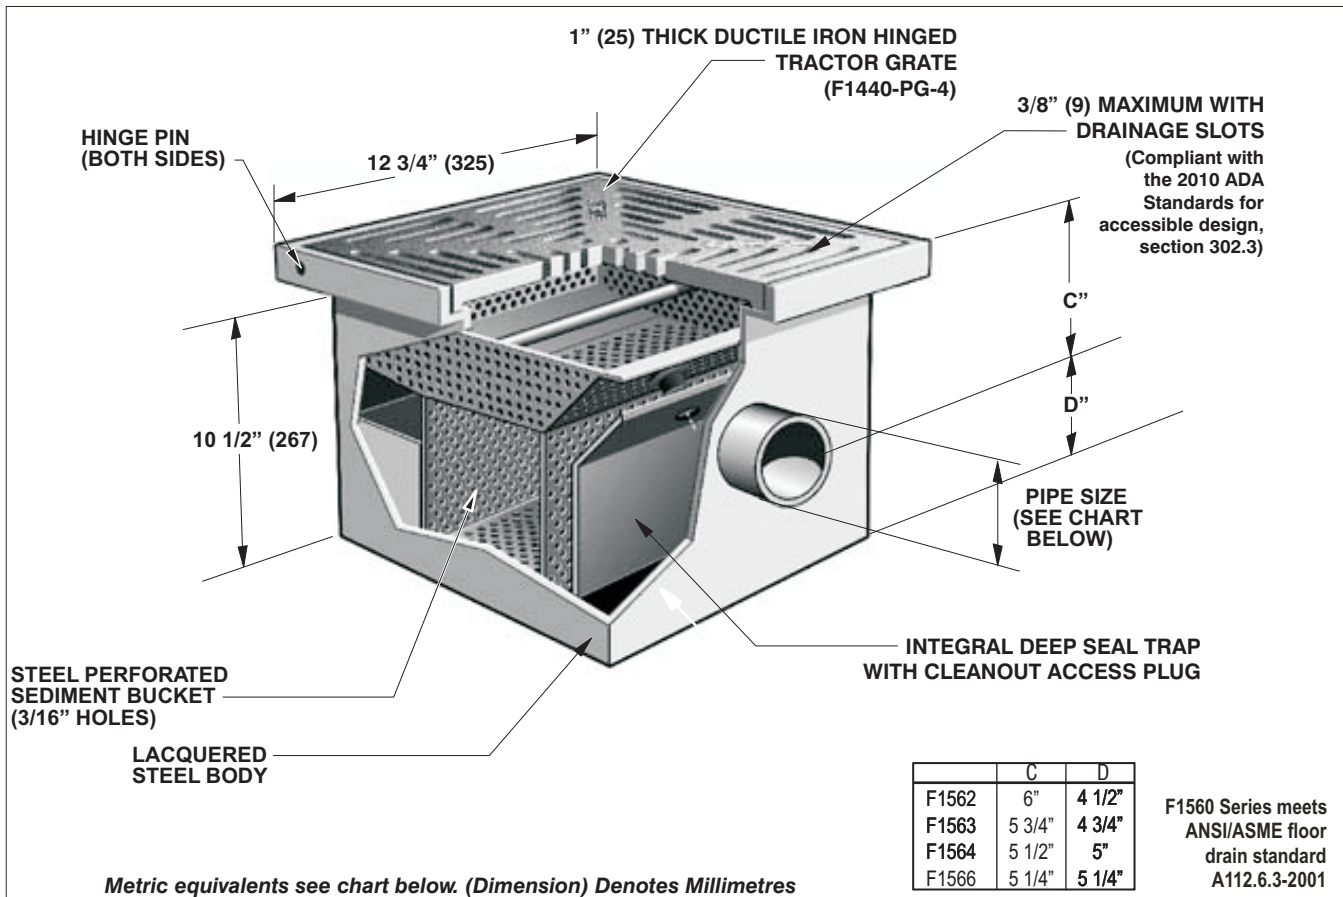

MODEL NO.	WEIGHT LBS.	GRATE SIZE	NO HUB PIPE SIZE	ANSI/ASME RATING	
				FREE AREA	LOAD RATING S.S. (-3), D.I. (-4)
F1562 F1563 F1564 F1566	116	12" x 12" (305 x 305)	2" (51) 3" (76) 4" (102) 6" (152)	51 in ² (32,903 ²)	ANSI/ASME LOAD CLASS "SPECIAL DUTY" (OVER 10,000 LBS.)

SUFFIX OPTIONAL VARIATIONS:

- 3 Stainless steel veneer top assembly (Add 3/16" to height)
- 4 Ductile iron grate
- 6 Security screws (TR30 Torx & pin)
- 7 1/2" trap seal primer connection
- 11 Acid resistant epoxy coated body
- 12 Galvanized top assembly
- 13 Galvanized body
- 28 Stainless steel body (Type 304)

SUFFIX

- ARRA ARRA (Stimulus Act) compliant product
- BA Buy American Act compliant product
- C Membrane clamp
- GS Grounding strap
- HP Heel proof grate (1/4" maximum grate opening size, -3 only)
- PA Pennsylvania Steel Act compliant product
- (Specify) Special outlet size

Job Name: _____
 Section No: _____
 Schedule No: _____

Page No: _____
 Contractor: _____
 Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880