

Location: _____




F1590

24" x 24" HEAVY DUTY DRAIN WITH OFFSET BOTTOM OUTLET

Specification: MIFAB Series F1590 powder epoxy coated drain with offset bottom outlet, anchor flange, and extra heavy duty 24" x 24" (610 x 610) two section ductile iron grates with a free area of 200 square inches (129,032²). Grates to have maximum 13/16" (21) openings.

Function: Used in industrial factories, mechanical rooms, parking garages and other membrane finished areas. 24" x 24" tractor grate is used with all types of poured finished floors. The anchor flange provides maximum support for drain.

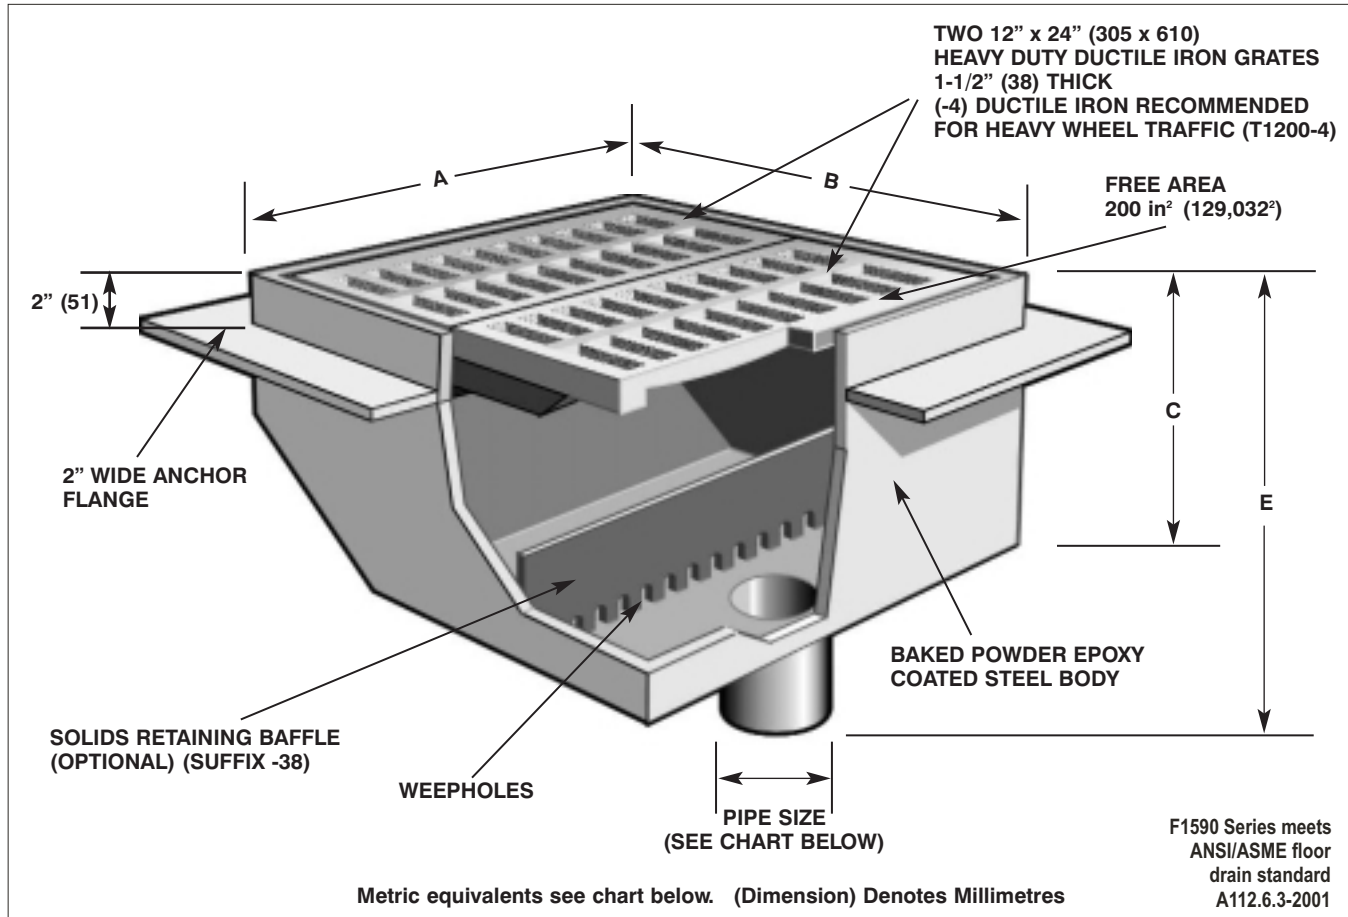

MODEL NO.	NO HUB PIPE SIZE	BODY DIMENSIONS			
		(A)	(B)	(C)	(E)
F1590-A	2" (51)	24 1/2" (622)	24 1/2" (622)	8" (203)	10" (254)
F1590-B	3" (76)				
F1590-C	4" (102)				
F1590-D	6" (152)				
F1590-E					

SUFFIX OPTIONAL VARIATIONS:

- 3 Stainless steel grates
- 4 Ductile iron grates
- 6 Security screws (TR30 Torx & pin)
- 8 Backwater valve (2", 3", 4")
- 12 Galvanized grates
- 13 Galvanized body
- 28 Stainless steel body (Type 304)
- 38 Solids retaining baffle

SUFFIX

- ARRA ARRA (Stimulus Act) compliant product
- BA Buy American Act compliant product
- C Membrane clamp
- PA Pennsylvania Steel Act compliant product
- (Specify) Special outlet size

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contractor: _____
Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880