

Location: _____




F1650-G

FLUSHING RIM FLOOR DRAIN WITH FLUSHING CONNECTION AND DEEP SEAL TRAP

Specification: MIFAB Series F1650-G flushing rim floor drain with white epoxy coated interior and exterior cast iron body, double wall deep seal trap with flushing connection, 3/4" (19) N.P.T. flushing connection in top assembly, anchor flange, membrane clamp, and stain finished (specify material finish) hinged grate and frame with stainless steel allen key vandal proof screws.

Function: Used in hospital operating and veterinary rooms, industrial and educational laboratories where waste must be drained to the sewer. Appropriate for mental institutions, zoos and prisons as drain type water closets.

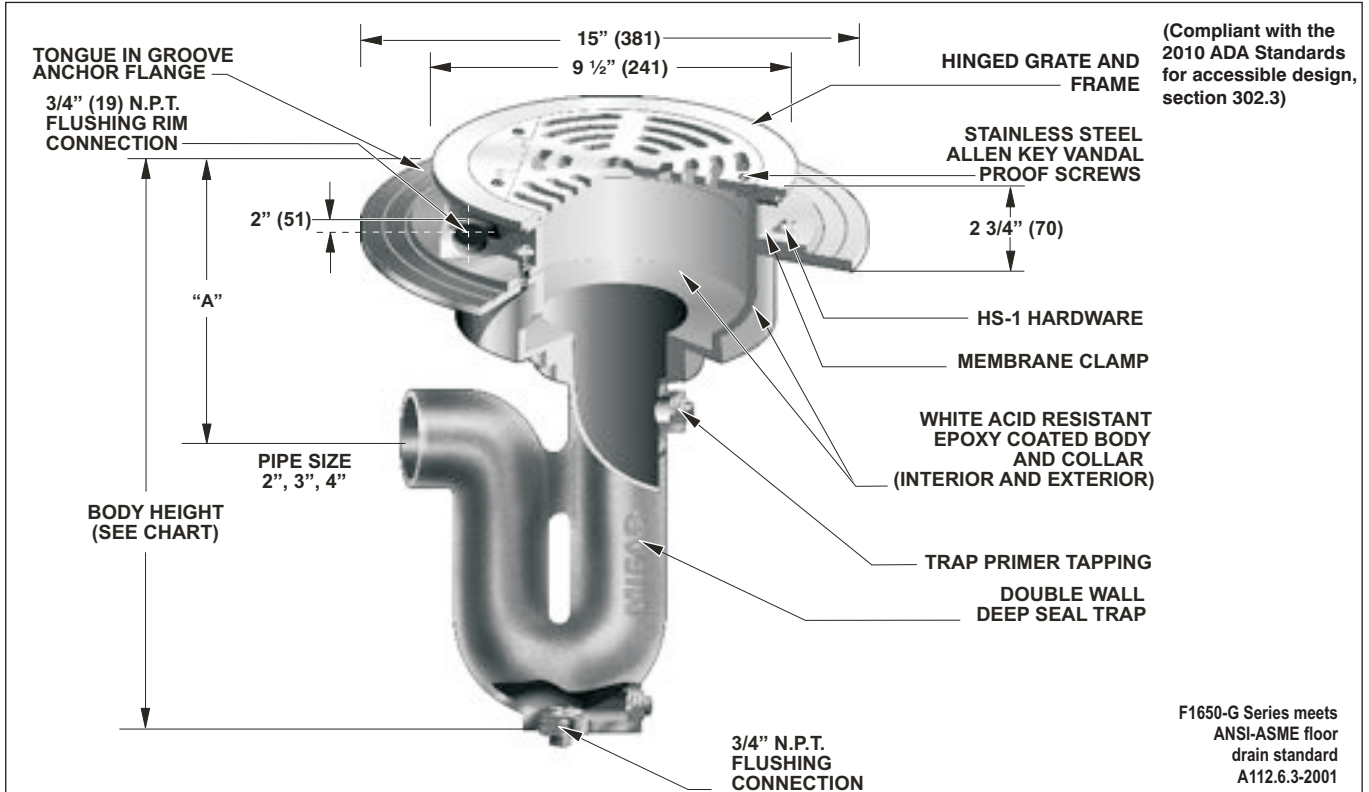

Note: See F1670 for water supply control box to be used with the flushing rim floor drain. Use a vacuum breaker between the potable water supply and the connection to the flushing rim connection (by others).

| STRAINER DIAMETER | ANSI/ASME RATING | | | PIPE SIZE | BODY HEIGHT | | | | |
|----------------------|---------------------|---------------------|------------------------|--------------|----------------------|----------------|-----------------|---------------------|------------------------|
| | FREE AREA | LOAD RATING | | | NO HUB (STANDARD) | PUSH ON (P) | THREADED (T) | INSIDE CAULK (X) | PVC/ABS (-30)/(-31) |
| | | N.B. (-1) | S.S. (-3) | | | | | | |
| 9" (229) | 18 in² (11,613²) | UP TO 2,000 LBS. | 2,000 TO 4,999 LBS. | 2" (51) | 6" (152) | 6 1/8" (156) | 5 7/16" (138) | 6 1/4" (159) | 7 1/8" (181) |
| | | | | 3" (76) | 6" (152) | 6 1/8" (156) | 5 7/16" (138) | 6 1/4" (159) | 7 3/8" (187) |
| | | | | 4" (102) | 6" (152) | 6 1/8" (156) | 5 7/16" (138) | 6 1/4" (159) | 7 3/8" (187) |
| | | | | 5" (127) | 6" (152) | — | 5 7/16" (138) | 6 1/4" (159) | — |
| | | | | 6" (152) | 7 1/4" (184) | 7" (178) | 7" (178) | 6 1/4" (159) | — |

SUFFIX OPTIONAL VARIATIONS:

- 1 Nickel bronze frame and grate
- 3 Stainless steel frame and grate
- 5 Sediment bucket
- 6 Security screws (T-20 Torx & pin)
- 13 Galvanized body
- 21 Secondary flat stainless steel strainer (2", 3", 4")
- 25-1 Nickel bronze hinged solid cover
- 28 Stainless steel body (Type 304)
- 30 PVC socket connection body

SUFFIX

- 31 ABS socket connection body
- 34 Closure plug
- 40 Underdeck clamp
- 41 Sump receiver
- 90 Threaded side outlet (2", 3", 4") (cast iron only)
- 90NH No hub side outlet (2", 3", 4") (cast iron only)
- 95 Client logo
- A Loose set grate
- ARRA ARRA (Stimulus Act) compliant product

SUFFIX

- BA Buy American Act compliant product
- HP Heel proof grate (1/4" maximum grate opening size, -3 only)
- (Standard) No hub outlet
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4")
- X Inside caulk outlet
- Z Extended wide elastomeric flange

Job Name: _____ Page No: _____
 Section No: _____ Contractor: _____
 Schedule No: _____ Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880