

Location: \_\_\_\_\_




**F1660**

**LARGE CAPACITY FLUSHING RIM FLOOR DRAIN**

**Specification:** MIFAB Series F1660, 25" (635) square large capacity flushing rim floor drain with white acid resistant epoxy coated cast iron interior and exterior body, 24" (610) diameter nickel bronze grate and 1" (25) flushing connection in body.

**Function:** Used in animal dens and laboratories. The large grate openings allow solids and animal wastes to pass into the drain. The acid resistant epoxy coating and flushing connection provide for sanitary condition.

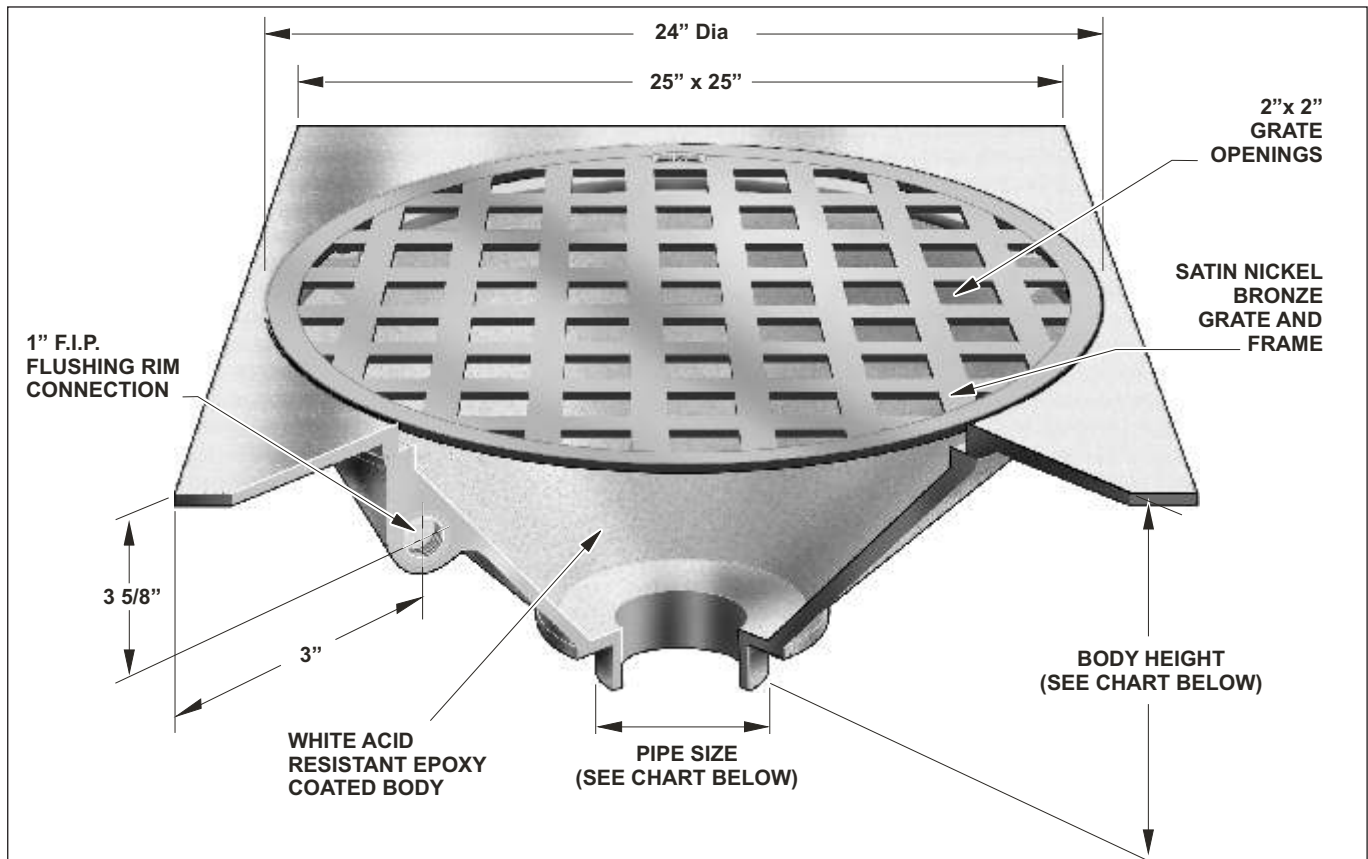

**Note:** See F1670 for water supply control box to be used with the flushing rim floor drain. Use a vacuum breaker between the potable water supply and the connection to the flushing rim connection (by others).

| STRAINER DIAMETER | ANSI/ASME RATING                               |                     | PIPE SIZE | BODY HEIGHT       |               |               |                  |                     |
|-------------------|--|---------------------|-----------|-------------------|---------------|---------------|------------------|---------------------|
|                   | FREE AREA                                      | LOAD RATING         |           | NO HUB (STANDARD) | PUSH ON (P)   | THREADED (T)  | INSIDE CAULK (X) | PVC/ABS (-30)/(-31) |
|                   |  | N.B. (-1)           |           |                   |               |               |                  |                     |
| 24" (610)         | 232 in <sup>2</sup><br>(149,677 <sup>2</sup> ) | UP TO<br>2,000 LBS. | 2" (51)   | 12 1/2" (318)     | 13 1/8" (333) | 12" (305)     | 13 1/2" (343)    | 12 11/16" (322)     |
|                   |  |                     | 3" (76)   | 12 1/2" (318)     | 13 1/8" (333) | 12 3/8" (333) | 13 1/2" (343)    | 13 1/2" (343)       |
|                   |  |                     | 4" (102)  | 12 1/2" (318)     | 13 1/8" (333) | 12 3/8" (333) | 13 1/2" (343)    | 13 1/2" (343)       |
|                   |  |                     | 5" (127)  | 12 1/2" (318)     | —             | 12 3/8" (333) | 13 1/2" (343)    | —                   |
|                   |  |                     | 6" (152)  | 13" (330)         | 14 1/2" (368) | —             | —                | —                   |

**SUFFIX OPTIONAL VARIATIONS:**

- 1 Nickel bronze grate
- 5 Sediment bucket
- 6 Security screws (TR30 Torx & pin)
- 8 Backwater valve (2", 3", 4")
- 13 Galvanized body
- 21 Secondary flat stainless steel strainer (2", 3", 4")

**SUFFIX**

- 30 PVC socket connection body
- 31 ABS socket connection body
- 90 Threaded side outlet (2", 3", 4") (cast iron only)
- 90NH No hub side outlet (2", 3", 4") (cast iron only)
- ARRA ARRA (Stimulus Act) compliant product

**SUFFIX**

- BA Buy American Act compliant product
- G Trap with flushing connection
- (Standard) No hub outlet
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4")
- X Inside caulk outlet
- Z Extended wide elastomeric flange

Job Name: \_\_\_\_\_ Page No: \_\_\_\_\_  
 Section No: \_\_\_\_\_ Contractor: \_\_\_\_\_  
 Schedule No: \_\_\_\_\_ Purchase Order No: \_\_\_\_\_

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880