


## **PLANTING AREA DRAIN**

**Specification:** MIFAB Series F1810 lacquered cast iron planting area drain with anchor flange, cast iron waterproofing membrane clamp ring, and standard self-locking cast dome strainer with stainless steel mesh screen.

**Function:** Used in areas such as flower boxes and others where the drain is buried underground. The stainless steel mesh screen covered dome prevents fines from entering the drain line. Membrane clamp is provided to secure the waterproofing membrane.

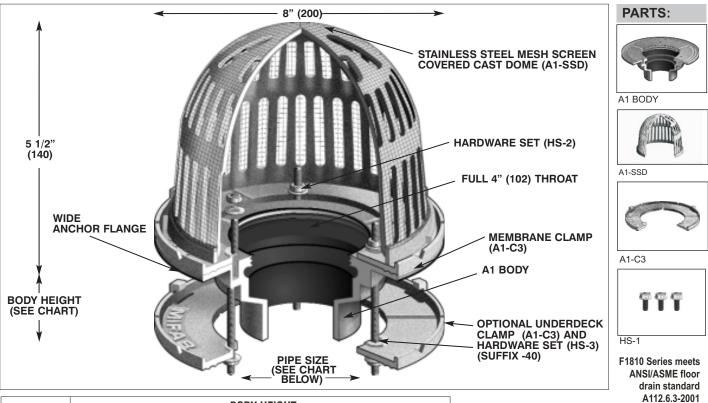

PIPE	BODY HEIGHT					
SIZE	NO HUB (Standard)	PUSH ON (P)	THREADED (T)	INSIDE Caulk (X)	PVC/ABS (-30)/(-31)	
2" (51)	3" (76)	3 3/8" (86)	2 1/4" (57)	3 3/4" (95)	2 15/16" (75)	
3" (76)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)	
4" (102)	3" (76)	3 3/8" (86)	2 5/8" (67)	3 3/4" (95)	3 3/4" (95)	
5" (127)	3" (76)	_	2 5/8" (67)	3 3/4" (95)	_	
6" (152)	3 1/4" (83)	6 1/2"(165)	_	_	_	

Deck opening - 6 3/8" (162) With sump receiver - 8" (203)

SUFFIX	OPTIONAL VARIATIONS:	SUFFIX	
-6	Vandal proof dome (H-1029)	-ARRA	ARRA (Stimulus Act)
-11	Acid resistant epoxy		compliant product
	coated body	-BA	Buy American Act
-13	Galvanized body		compliant product
-28	Stainless steel body (Type 304)	(Standard)	No hub outlet
-30	PVC socket connection body	Р	Push on outlet
-31	ABS socket connection body	-PA	Pennsylvania Steel
-40	Underdeck clamp		Act compliant product
-41	Sump receiver	Ţ	Threaded outlet (2",3",4")
-81	Rough bronze dome with S.S. mesh	X	Inside caulk outlet
-90	Threaded side outlet (2",3",4") (cast iron only)		
-90NH	No hub side outlet (2" 3" 4")		

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

(cast iron only)

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880