

Location: _____




F1840

PLANTING AREA DRAIN WITH 9" ROUND ADJUSTABLE TRACTOR GRATE WITH STAINLESS STEEL BALLAST GUARD

Specification: MIFAB Series F1840 lacquered cast iron planting area drain with anchor flange, cast iron membrane clamp ring with primary and secondary weepholes for waterproofing membrane, stainless steel ballast guard, and standard 1" (25) thick, 9" (229) round, (specify material finish) tractor grate.

Function: Used in areas such as flower boxes and others where water is required to drain through the soil surrounding the drain. Perforated standpipe allows for sub surface drainage of water. The stainless steel ballast guard prevents fines from entering the drain line. 9" round, adjustable tractor grate is set at ground level and permits the drainage of excess surface water. Membrane clamp is provided to secure the waterproofing membrane.

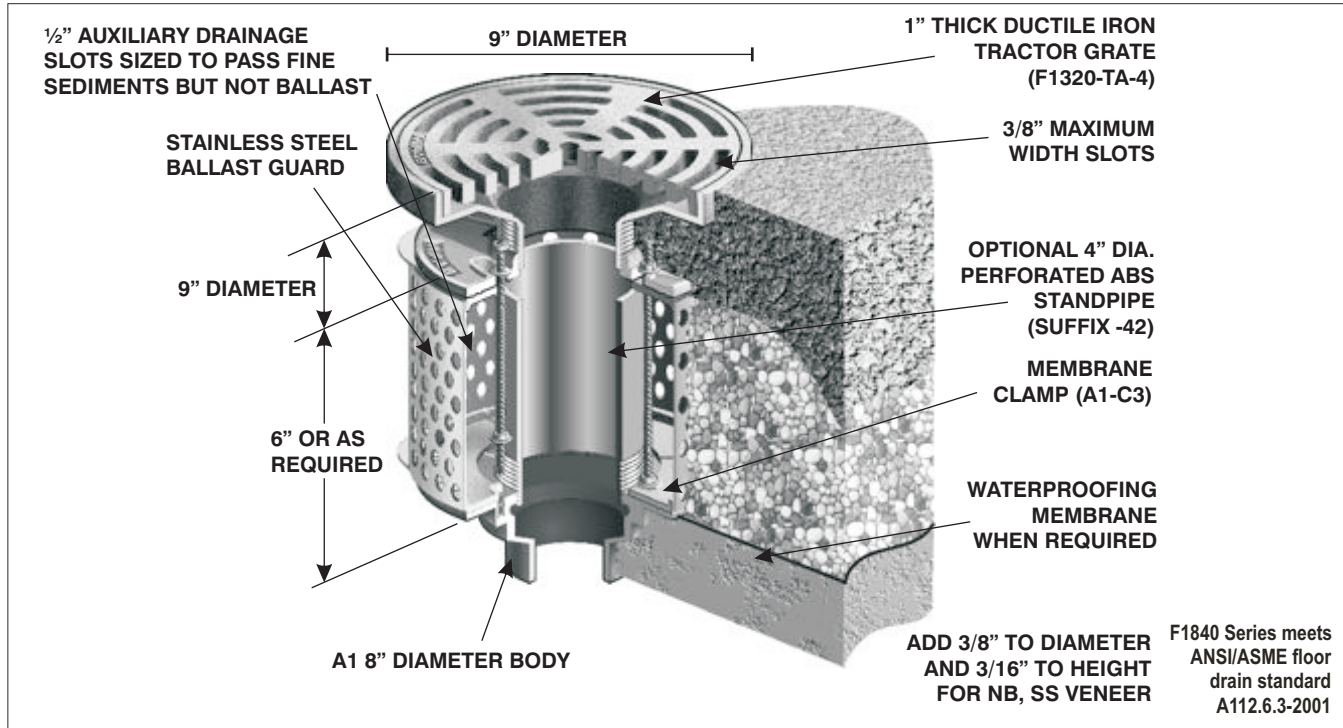

STRAINER DIAMETER	STRAINER ADJUSTMENT		ANSI/ASME RATING		PIPE SIZE	BODY HEIGHT				
	MIN	MAX	FREE AREA	LOAD RATING N.B. (-1) / S.S. (-3) / D.I. (-4)		NO HUB (STANDARD)	PUSH ON (P)	THREADED (T)	INSIDE CAULK (X)	PVC/ABS (-30)/(-31)
9" (229)	1 3/4" (44)	2 5/8" (67)	26 in ² (26,800 ²)	ANSI/ASME LOAD CLASS "SPECIAL DUTY" (OVER 10,000 LBS.)	2" (51) 3" (76) 4" (102) 5" (127) 6" (152)	3" (76) 3" (76) 3" (76) 3" (76) 3 1/4" (83)	3 3/8" (86) 3 3/8" (86) 3 3/8" (86) — 6 1/2" (165)	2 1/4" (57) 2 5/8" (67) 2 5/8" (67) 2 5/8" (67) —	3 3/4" (95) 3 3/4" (95) 3 3/4" (95) 3 3/4" (95) —	2 15/16" (75) 3 3/4" (95) 3 3/4" (95) — —

SUFFIX OPTIONAL VARIATIONS:

- 1 Nickel bronze strainer (vener)
- 3 Stainless steel strainer (vener)
- 4 Ductile iron strainer
- 5 Sediment bucket
- 6 Security screws (TR30 Torx & pin)
- 7 1/2" trap seal primer connection
- 8 Backwater valve (2", 3", 4")
- 11 Acid resistant epoxy coated body
- 12 Galvanized top assembly
- 13 Galvanized body
- 15 Extension
- 16 Square top
- 28 Stainless steel body (Type 304)
- 30 PVC socket connection body

SUFFIX

- 31 ABS socket connection body
- 34 Closure plug
- 40 Underdeck clamp
- 41 Sump receiver
- 42 ABS perforated standpipe
- 50 Lacquered cast iron funnel
- 90 Threaded side outlet (2", 3", 4") (cast iron only)
- 90NH No hub side outlet (2", 3", 4") (cast iron only)
- 95 Client logo
- AR Ballast guard other than 6"
- ARRA ARRA (Stimulus Act) compliant product

SUFFIX

- BA Buy American Act compliant product
- F4 4" Round funnel
- F6 6" Round funnel
- G Oval 4" x 9" funnel
- HP Heel proof grate (1/4" maximum grate opening size, -3 only)
- J 6" x 3" x 1" funnel
- (Standard) No hub outlet
- P Push on outlet
- PA Pennsylvania Steel Act compliant product
- T Threaded outlet (2", 3", 4", 5")
- X Inside caulk outlet
- Z Extended wide elastomeric flange

Job Name: _____
Section No: _____
Schedule No: _____

Page No: _____
Contractor: _____
Purchase Order No: _____

MIFAB reserves the right to make changes in material and design without formal notice and obligation.

USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880