Location:




POST HYDRANT

(specify length) non freeze post hydrant with exposed bronze head and Specification: MIFAB Series MHY-66 1 1/4", 1 1/2" or 2" (specify) male inlet connection. Hydrant assembly complete with one piece neoprene plunger, hardened bronze operating stem, 1" (25) galvanized steel casing, heavy duty bronze head casting with head nut assembly, 3/8" (9) diameter galvanized steel operating rod, decorative casing guard, tapped 1/8" (3) drain port in the bronze tailpiece, and an operating key.

MHY-66

Operation: Opening the hydrant will allow water to flow freely from the hose **OPERATING KEY** connection and seal the drain port to prevent water from being wasted. Closing HANDLE the hydrant opens the drain port to allow existing water in the hydrant to drain to DECORATIVE prevent freezing. (102)**CASING GUARD 4**" Features: The 1" (25) galvanized steel casing will prevent rust and deterioration (OPTIONAL) in acidic ground areas. The head nut assembly can be removed for ready access to internal parts. 3/4" (19) **Function:** Intended for installation in exterior deck areas, farms, golf courses, parks, MALÈ HÓSE Plumbing and Drainage CONNECTION for connection to 1 1/4", 1 1/2" or 2" water supply. Mechanical Section HEAVY DUTY 20" **BRONZE HEAD** 24" MODEL **OVERALL BURY** (610) (508)CASTING NO. LENGTH DEPTH (25) GALVANIZED FT IN MM CM Lbs. STEEL CASING MHY-66-2 48 122.0 2 60.9 10 MHY-66-3 60 152.0 3 91.4 13 MHY-66-4 72 183.0 4 121.9 15 **GROUND LEVEL** 5 17 MHY-66-5 84 213.0 155.4 MHY-66-6 96 244.0 6 182.9 19 MHY-66-7 108 274.0 7 213.4 21 MHY-66-8 120 305.0 8 243.8 23 MHY-66-9 132 355.0 9 274.3 25 MHY-66-10 144 366.0 10 304.8 27 SUFFIX OPTIONAL VARIATIONS: 1" (25) hose connection -0 -8 Vacuum breaker -12 Wheel handle -42 Decorative casing guard 1 1/4" connection -125 -150 1 1/2" connection -200 2" connection **BURY DEPTH DRAIN PORT** TAPPED FOR 1/8" (3) N.PT. 1 1/4". 1 ½" OR 2" M.I.P. INLET CONNECTION (Dimension) Denotes Millimetres

Job Name: Page No: _ Section No: Contractor:_ Purchase Order No: Schedule No: MIFAB reserves the right to make changes in material and design without formal notice and obligation. USA: 1-800-465-2736 www.mifab.com CAN: 1-800-387-3880

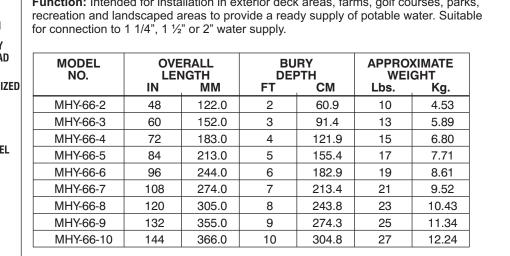

(Certified to A.S.S.E. Standard 1011 and listed with I.A.P.M.O.)

Page H17