


## Z1183-DF SOLIDS INTERCEPTOR WITH **DISPOSABLE FILTER BAGS**

SPECIFICATION SHEET

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

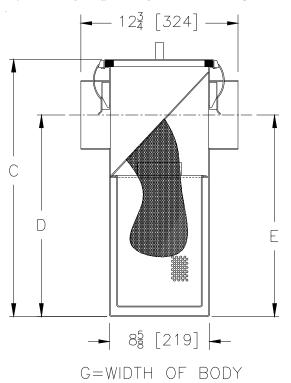

Size	Inlet/ Outlet Size	Flow Rate G.P.M. [L]	Solids Cap. of Basket Cubic Ft. [m³]	Dimensions In Inches			No. of Filter Bags
Size				С	G	D/E	Per Unit
100	2 [51]	4 [15]	0.20 [.006]	10 [254]	9-7/8 [251]	7-1/4 [184]	1
200	2 [51]	7 [26]	0.29 [.008]	11-1/8 [283]	11-7/8 [302]	8-1/8 [206]	2
300	3 [76]	10 [38]	0.33 [.009]	11-3/4 [298]	14 [356]	8-1/4 [210]	2
400	3 [76]	15 [57]	0.38 [.011]	13-3/8 [340]	16-3/4 [425]	9-3/8 [238]	2
500	3 [76]	20 [76]	0.66 [.019]	15 [381]	17-1/4 [438]	11-3/4 [298]	2
600	4 [102]	25 [95]	0.79 [.022]	17 [432]	19-7/8 [507]	12-7/16 [316]	3
700	4 [102]	35 [132]	1.17 [.033]	18-3/4 [476]	22-1/2 [572]	14-3/16 [360]	3
800	4 [102]	50 [189]	1.35 [.038]	21-1/2 [546]	22-1/2 [572]	16 [406]	3
900	4 [102]	75 [284]	1.61 [.046]	22-3/4 [578]	22-1/2 [572]	18-1/2 [470]	3

## ENGINEERING SPECIFICATION: ZURN Z1183-DF

Acid resistant coated fabricated steel, or stainless steel, solids interceptor, for on floor or semi-recessed installation with replaceable filter bags, retainer plate, latched lid, and removable sediment basket. Size to be used with corresponding Z1170 grease Interceptor.

## PREFIXES

- Ζ
- Acid Resistant Coated Fabricated Steel\*
  - ZS All Type 304 Fabricated Stainless Steel

## SUFFIXES

- -XB
- Extra Solids Interceptor Basket.
  - \_ -XF Extra Supply of 30 Solids Filter Bags.
- **CAUTION:** Solids interceptor must be maintained periodically in

order to ensure proper operation of the system.

Cleaning schedule based on usage.

	REV. A	DATE: 10	)/22/10	C.N. NO. 111967				
	DWG. NO.	67592	PRO	DUCTNO. Z1183-DF				
ΞE	E OPERATION ♦ 1801 Pittsburgh Ave. ♦ Erie. PA 16514							

\*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

Phone: 814/455-0921 Fax: 814/454-7929 World Wide Web: www.zurn.com

In Canada: ZURN INDUSTRIES LIMITED + 3544 Nashua Drive + Mississauga, Ontario L4V1L2 + Phone: 905/405-8272 Fax: 905/405-1292