

## AquaSense<sup>®</sup> TAG \_\_\_\_\_

# Z6922-XL

AquaSense Back Mount Battery Powered Faucet



ADA compliant, battery powered, chrome plated sensor faucet for retrofit and new construction.

Flow Rate

1.5 gpm Vandal Resistant Laminar Flow (-J\*)

Occupant Detection

Infrared convergence-type proximity sensor Thirty Second Time out feature

- Spout module Chrome Plated Cast Brass
- Also Includes
  - In-line filter
  - 4 "AA" batteries Inlet for a 1/2"[13] ball riser

#### Accessories

□ -CG □ -DSA □ -GA □ -GC □ -MT □ -MV □ -RR □ -SH □ -SH □ -SSH □ -SO □ -TMV	CareGuard Aerator Drug Screening Applications 3-1/2" Gooseneck Spout 8" Gooseneck Spoutt Mixing Tee Temperature Mixing Valve Reduced Range Supply Hoses for Mixing Valve Single Stainless Supply Hose (-XL) Rosette Spray Aerator Thermostatic Mixing Valve for Multiple Faucets Thermostatic Mixing Valve for Single
□ -XT	Faucets Extended Range, Less Timeout
□	Other

Careguard currently only available with -E, 1.5 Vandal Resistant Laminar Aerator.



\*This product should be used with a WaterSense labeled counterpart with a compatible flush volume to ensure that the entire system meets the requirements for water efficiency and performance.

Zurn Lead Free products (-XL) is the line of durable, high quality brass faucets and fixtures that are designed and manufactured to comply with Section 1417 of the Safe Drinking Water Act (SDWA) which mandates the weighted average lead content of no more than 0.25% of the wetted surface.



Flow Control Options

□-E\* 1.5 gpm/ 5.7 Lpm Vandal-Resistant Aerator

□ -F 0.5 gpm/1.9 Lpm Vandal-Resistant Non-Aerated

□ -K\* 1.0 gpm/ 3.8 Lpm Vandal-Resistant Laminar Flow

□ -L 1.0 gpm/ 3.8 Lpm Vandal-Resistant Aerator

□ -M 0.35 gpm/1.3 Lpm Vandal-Resistant Non-Aerated

 $\Box$  -N  $\,$  0.5 gpm/1.9 Lpm Vandal-Resistant Laminar Flow  $\,$ 

#### Power Supply Choices (Sold Separately)

□-ACA 6 VDC Plug-In Power Converter □-HW6 Hardwired Power Converter

### Optional Power Supply Accessories

□-CWB Connector Wire for Hardwire Install □-MJ Mini Junction Box

NOTE: For Hardwire applications furnish P6000-HW6 power converter. Order P6000-HW6 power converter seperately.

The P6000-HW6 and P6000-MJ will power up to 8 sensor faucets.

Architectural/Engineering Approval

The information contained in this document is subject to change without notice. Please contact Zurn for most up to date information.

ZURN INDUSTRIES, LLC. 


COMMERCIAL BRASS OPERATION
5900 ELWIN BUCHANAN DRIVE 

SANFORD NC 27330
PHONE: 1-800-997-3876 

FAX: 919-775-3541
WWW.ZURN.COM
IN CANADA: ZURN INDUSTRIES LIMITED
7900 GOREWAY DRIVE UNIT 10 

BRAMPTON, ONTARIO L6T5W6
PHONE: 905-405-8272 FAX: 905-405-1292

AquaSense® is a registered trademark of Zurn Industries, LLC.

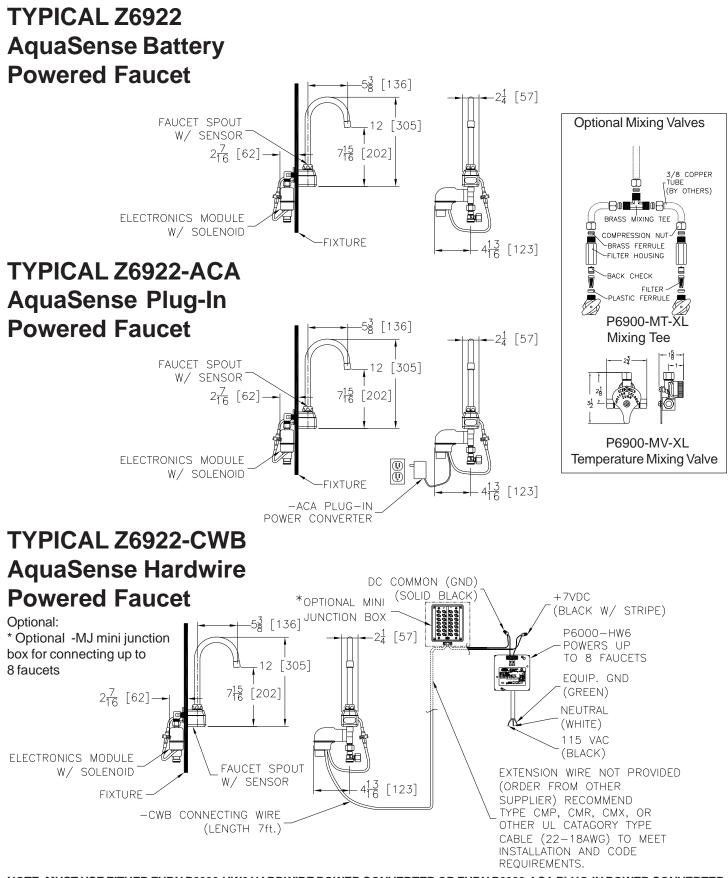

NOTE: MUST USE EITHER ZURN P6000-HW6 HARDWIRE POWER CONVERTER OR ZURN P6000-ACA PLUG-IN POWER CONVERTER TO ENSURE PROPER OPERATION. USING A POWER CONVERTER OTHER THAN ZURN MAY RESULT IN OPERATION MALFUNCTION OR UNIT FAILURE.