


LARGE PLANTING AREA DRAIN

Specification: MIFAB Series F1820 lacquered cast iron deep sump large planting area drain with anchor flange, cast iron waterproofing membrane clamp ring, and low profile, self-locking aluminum dome strainer with stainless steel mesh screen.

Function: Used to drain water that accumulates in planting or flower boxes. The stainless steel mesh covered aluminum dome prevents fines from entering the drain line.



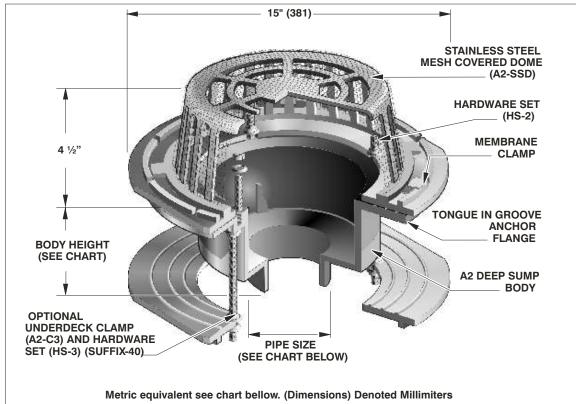

A2 BODY



A2-SSD



A2-C3



HS-2

F1820 Series meets ANSI/ASME floor drain standard A112.6.3-2001

PIPE	BODY HEIGHT					
SIZE	NO HUB (Standard)	PUSH ON (P)	THREADED (T)	INSIDE Caulk (X)	PVC/ABS (-30)/(-31)	
2" (51)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 1/8" (181)	
3" (76)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)	
4" (102)	6" (152)	6 1/8" (156)	5 7/16" (138)	6 1/4" (159)	7 3/8" (187)	
5" (127)	6" (152)	_	5 7/16" (138)	6 1/4" (159)	_	
6" (152)	7 1/4" (184)	7" (178)	7" (178)	6 1/4" (159)	_	

-6 -11	OPTIONAL VARIATIONS: Vandal proof dome (H-1029) Acid resistant epoxy coated body Galvanized body	SUFFIX -ARRA -BA	ARRA (Stimulus Act) compliant product Buy American Act compliant product
-15 -28 -30 -31 -40 -41	Extension Stainless steel body (Type 304) PVC socket connection body ABS socket connection body Underdeck clamp Sump receiver	(Standard) P -PA T X	No hub outlet Push on outlet Pennsylvania Steel Act compliant product Threaded outlet (2",3",4") Inside caulk outlet
-81 -90	Rough bronze dome with S.S. mesh Threaded side outlet (2",3",4") (cast iron only)		

Job Name:	Page No:
Section No:	Contractor:
Schedule No:	Purchase Order No:

(cast iron only)

No hub side outlet (2", 3", 4")

-90NH