


Z1406HEAVY-DUTY SPIGOT CLEANOUT ADJUSTABLE

TAG

Dimensional Data (inches and [mm]) are Subject to Manufacturing Tolerances and Change Without Notice

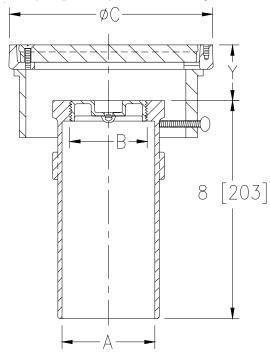

Dir	mensions In	Approx.	'Y'		
A PIPE SIZE	B N.P.T.	С	Wt. Lbs. [kg]	Min.	Max.
2 [51]	1-/2 [38]	5-1/8 [130]	8 [4]		
3 [76]	2 [51]	6-1/8 [156]	11 [5]	7/8	2
4 [102]	3-1/2 [89]	7-1/4 [184]	15 [7]	[22]	[51]
5 [127]	3-1/2 [89]	8-1/4 [210]	19 [9]		
6 [152]	3-1/2 [89]	9-1/4 [235]	23 [10]		

(Add 1/8 [3] to 'Y' Dim. for ZB and ZN only)

*REGULARLY FURNISHED UNLESS OTHERWISE SPECIFIED

ENGINEERING SPECIFICATION: ZURN Z1406

Adjustable floor cleanout with spigot connection for caulking into Hub. Dura-Coated cast iron body with gas and watertight ABS plug and cast iron housing with round, scoriated, secured cast iron heavy-duty cover adjustable to finished floor.

OPTIONS (Check/specify appropriate options)

DATE: 11/03/10

C.N. NO. 120230

PRODUCT NO. Z1406

PIPE SIZE

(Specify size) **OUTLET**

2 thru 6 [51 thru 152]

___ -SP Spigot

	Z	Dura-Coated Cast Iron*							
	ZB	D.C.C.I. Body with Polished Bronze Light-Duty Top (Deduct 1/2 [13] from 'Y' Dim.)							
	ZΝ	D.C.C.I. Body with Polished Nickel Bronze Light-Duty Top (Deduct 1/2 [13] from 'Y' Dim.)							
	ZS	D.C.C.I. Body with Polished Stainless Steel Heavy-Duty Top (Add 3/16 [5] to 'Y' Dim.)							
SUFFIX	ŒS								
	-AR	Acid Resisting Epoxy Coated Finish		-SG	Solid Gasketed Cover				
	-BP	Bronze Plug		-SM	Special Marking Stamped on Top				
	-CF	Carpet Flange (ZB and ZN only)		-T	SquareTop				
	-CM	CarpetMarker		-TX	Square Top Recessed for 1/8 [3] Tile				
	-DC	Duresist Cover			(ZB and ZN only)				
	-DX	Round ZB or ZN Top with Dex-o-Tex Flange		-VP	Vandal-Proof Screws				
		(2-4 [51-102] Sizes Only)		-X	Round Top Recessed for 1/8 [3] Tile				
	-G	Galvanized Cast Iron			(ZB and ZN only)				
	-HD	Heavy-Duty Veneer Top			•				

REV. F

DWG. NO. 58761